


RiseTec XTRA 8 DT

8x19 S – FC Fiber Core

We recommend this application for standard elevator in low and midrise section. The dual tensile of the wire rope makes it suitable for soft traction sheaves.

The RiseTec XTRA 8 DT is an 8x19 Seale steel wire rope dual tensile with natural fiber core (FC).

- For softer traction sheaves
- Natural fiber core (Sisal)
- Flexible
- Low and mid-rise
- Most common rope construction
- Small to intermediate number of bending cycles

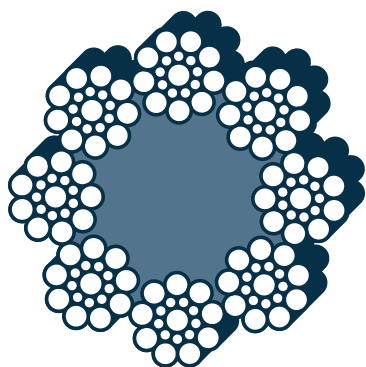

Technical Data:

8 x 19 Seale FC regular lay.

Technical terms regarding DIN EN 12385, ISO 4344

Tensile grade: 1370/1770 N/mm²

Coating: ungalvanized / bright

Total number of wires: 152

ROPE CONSTRUCTION	ROPE Ø mm	ART. NR.	WEIGHT kg/m	M.B.L kN
RiseTec XTRA 8 DT Fiber Core 8 x 19 S - FC ungalv. 1370/1770 N/mm ²	8,0	18200000	0,220	30,5
	9,0	18200001	0,290	38,4
	9,5	18200002	0,325	43,1
	10,0	18200003	0,343	48,2
	11	18200004	0,430	58,4
	12	18200005	0,494	69,2
	13	18200006	0,613	80,7
	16	18200007	0,878	121,0