


RiseTec XTRA 8 MS

8 x 19 S – IWRC Mixed core wire rope

We recommend this application for installation where the traction sheave abrasion has a higher impact on the service life, than bending. The thicker wires of the Seale Construction have a higher abrasion resistance. The lubricant reservoir of the fiber content in the core offers a long service lifetime of the steel wire rope.

The RiseTec XTRA 8 MS is an 8x19 Seale steel wire rope with combined steel and fibre core (IWRC).

- higher breaking force
- abrasion resistant
- extended service life
- low and mid-rise
- low elongation
- small to intermediate number of bending cycles
- normal to heavy usage levels
- large metallic cross-section

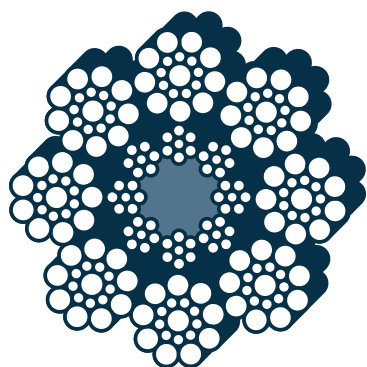

Technical Data:

8 x 19 Seale IWRC (8x7) regular lay.

Technical terms regarding DIN EN 12385, ISO 4344

Tensile grade: 1570 N/mm²

Coating: ungalvanized / bright

Total number of wires: 208

ROPE CONSTRUCTION	ROPE Ø mm	ART. NR.	WEIGHT kg/m	M.B.L kN
RiseTec XTRA 8 MS Mixed Core 8 x 19 S - IWRC ungalv. 1570 N/mm ²	8,0	18300000	0,243	38,0
	9,0	18300001		48,3
	10,0	18300002	0,385	60,5
	11,0	18300003		73,4
	12,0	18300004		86,8
	13,0	83000005	0,650	103,1
	14,0	18300006		
	15,0	18300007		
	16,0	18300008	0,981	154,8