

RiseTec XTRA 9


9 x 19 S – IWRC

Full steel core wire rope

We recommend this application for High Rise and High-speed installation where you have the maximum demand on lifetime, breaking force, elongation and riding comfort. High performance wire rope for High Performance installation.

The RiseTec XTRA 9 is a 9 strand 9 x 19 Seale steel wire rope with an independent steel core (IWRC). For installation with the highest requirement to the rope.

- High rise or high-speed installation
- Extended service life
- Low elongation
- Small to intermediate number of bending cycles
- Heavy usage levels
- Large metallic cross-section
- Maximum riding comfort

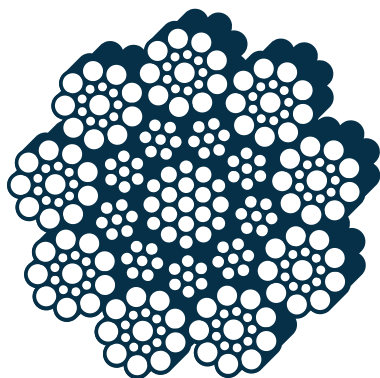

Technical Data:

9 x 19 Seale IWRC (9x7 + 1x19 W) regular lay.

Technical terms regarding DIN EN 12385, ISO 4344

Tensile grade: 1570 N/mm²

Coating: ungalvanized / bright

Total number of wires: 253

ROPE CONSTRUCTION	ROPE Ø mm	ART. NR.	WEIGHT kg/m	M.B.L kN
RiseTec XTRA 9 Steel Core 8 x 19 S - IWRC ungalv. 1570 N/mm ²	8,0	18500000		43,2
	9,0	18500001		54,8
	10,0	18500002	0,446	67,2
	11,0	18500003	0,540	80,2
	12,0	18500004		95,6
	13,0	18500005		113,4
	134,0	18500006		135,7
	15,0	18500007		152,8
	16,0	18500008		174,0