


9 x 19 S – IWRC

RiseTec ULTRA 9 Full steel core wire rope

We recommend this application for High Rise and High-speed installation where you have the maximum demand on lifetime, breaking force, elongation and riding comfort. High performance wire rope for High Performance installation.

The RiseTec ULTRA 9 is a 9 strand 9 x19 Seale steel wire rope with an independent steel core (IWRC). For installation with the highest requirement to the rope.

- High rise or high-speed installation
- Extended service life
- Low elongation
- For heavy use and maximum number of bending cycles
- Heavy usage levels
- Large metallic cross-section
- Maximum riding comfort

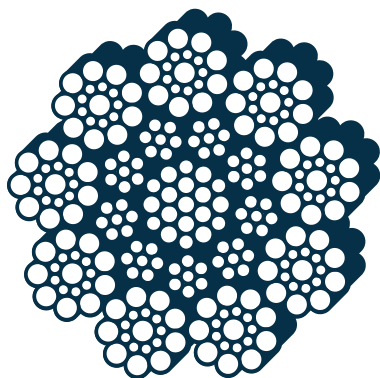

Technical Data:

9 x 19 Seale IWRC (9x7 + 1x19 W)

Technical terms regarding DIN EN 12385, ISO 4344

Tensile grade: 1570 N/mm²

Coating: ungalvanized / bright

Total number of wires: 253

ROPE CONSTRUCTION	ROPE Ø mm	ART. NR.	WEIGHT kg/m	M.B.L kN
RiseTec ULTRA 9 Steel Core 9 x 19 S - IWRC 1570 N/mm ²	8,0	18500000	0,271	43,2
	9,0	18500001	0,343	54,8
	10,0	18500002	0,446	67,2
	11,0	18500003	0,540	80,2
	12,0	18500004	0,607	95,6
	13,0	18500005	0,713	113,4
	14,0	18500006	0,827	135,7
	15,0	18500007	0,949	152,8
	16,0	18500008	1,080	174,0